


GF Verschraubung mit Kegeldichtung verzinkt 340

Anzugsmomente sowie Hinweise zum Verschrauben siehe "Technische Produkthinweise".
374 G ... gibt die Gewindegrösse G gemäss ISO 228 der Überwurfmutter 374 an.

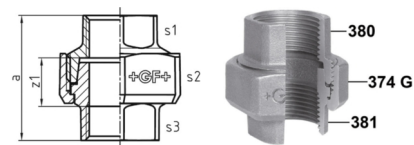

Orig. Nr.	Dim.	374 G	a	z1	s1	s2	s3	Gewicht	NPK-Nr.			CHF	
										Stück	Stück		
	Zoll	Zoll	mm	mm	mm	mm	mm	kg				Stück	
770340201	1/8	1/2	38	24	15	26	15	0.06		1	80	32102-0753	47.90
770340202	1/4	5/8	42	22	19	28	*10	0.10		1	10	32102-0754	22.70
770340203	3/8	3/4	48	28	22	32	*12	0.11	225.121	1	10	32102-0755	18.10
770340204	1/2	1	48	22	26	41	25	0.20	225.122	1	10	32102-0756	13.85
770340205	3/4	1 1/4	52	22	31	48	32	0.26	225.123	1	10	32102-0757	15.85
770340206	1	1 1/2	58	24	38	55	38	0.38	225.124	1	30	32102-0758	18.10
770340207	1 1/4	2	65	27	48	67	48	0.62	225.125	1	20	32102-0759	33.70
770340208	1 1/2	2 1/4	70	32	54	74	54	0.77	225.126	1	15	32102-0760	39.75
770340209	2	2 3/4	78	30	66	90	66	1.21		1	10	32102-0761	65.35
770340210	2 1/2	3 1/2	90	36	85	111	85	2.02	225.128	1	5	32102-0762	141.40
770340211	3	4	101	41	96	130	96	2.48		1	4	32102-0763	222.15
770340212	4	5	114	42	120	151	120	4.80		1	4	32102-0764	444.30

* Innen 6-Kant