


Hawle Mauerdurchführung PE-AG gerade, PN 16 6850

- Mit Aussengewinde, gerade, PN 16, Stutzen PE 100, SDR 11
- PE-Messingverbindung form- und kraftschlüssig im Mauerchutzrohr
- Schutzmantel aus HDPE mit Festpunktfixierung, SVGW-zertifiziert

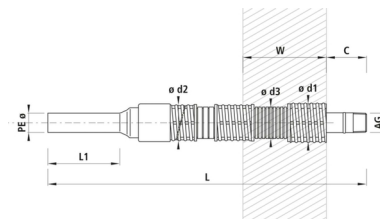

Orig. Nr.	PE-Ø mm	AG Zoll	DN	L mm	L1 mm	Ø d1 mm	Ø d2 mm	Ø d3 mm	C cm	Gewicht kg	NPK-Nr.	Stück	CHF Stück	
6850032070	32	1	25	780	400	66	60	53	6-10	1.10	884.152	1	33211-1993	146.00
6850032110	32	1	25	1100	300	66	60	53	6-10	1.50		1	33211-1994	178.00
6850040070	40	1 1/4	32	780	400	60	66	53	6-10	1.19		1	33211-0882	168.00
6850040110	40	1 1/4	32	1100	700	60	66	53	6-10	1.57		1	33211-0885	202.00
6850050070	50	1 1/2	40	780	400	80	75	75	8-12	2.15	884.154	1	33211-0883	178.00
6850050110	50	1 1/2	40	1100	700	80	75	75	8-12	2.85		1	33211-0886	211.00
6850063070	63	2	50	780	400	95	90	90	8-12	2.64	884.155	1	33211-0884	202.00
6850063110	63	2	50	1100	700	95	90	90	8-12	3.57		1	33211-0887	234.00