


Flexwinkel 0° – 12°, PE 100, Muffe-Spitzenende, SDR 11

Gas 10 bar / Wasser 16 bar

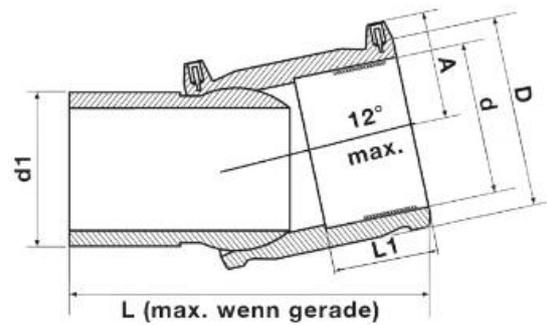


Artikel-Nr.	d x d1	A	D	L	L1	Gewicht (kg)
4947D4090	90 x 90	77	116	258	72	0,9400
4947D4110	110 x 110	83	140	276	85	1,2900
4947D4125	125 x 125	95	157	292	90	1,7400
4947D4160	160 x 160	114	200	335	96	3,1500
4947D4180	180 x 180	128	223	365	104	4,2100
4947D4200	200 x 200	125	250	370	104	6,1720
4947D4225	225 x 225	141	282	426	105	8,3400
4947D4250	250 x 250	156	312	436	123	10,7200

Position wird bei der Verschweißung dauerhaft fixiert.

Flexwinkel 0° – 24°, PE 100, Muffe-Muffe, beidseitig flexibel ausrichtbar, SDR 11

Drucken

Gas 10 bar / Wasser 16 bar

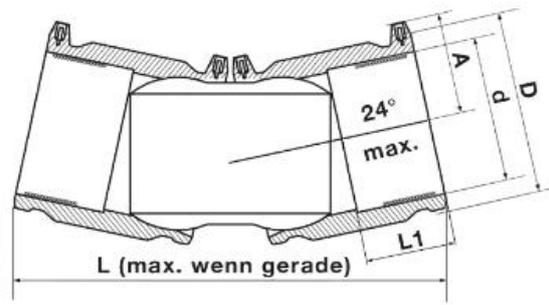

Artikel-Nr.	d	A	D	L	L1	Gewicht (kg)
4947C4090	90	77	116	341	72	1,4500
4947C4110	110	83	140	362	80	2,0300
4947C4125	125	95	157	382	85	2,6300
4947C4160	160	114	200	456	96	4,5100
4947C4180	180	128	224	511	104	7,4900
4947C4200	200	125	250	512	104	9,7330
4947C4225	225	141	282	600	105	13,2200
4947C4250	250	156	312	595	123	14,6000

Position wird bei der Verschweißung dauerhaft fixiert.